

Product Guideline





Filter Part

Origin Pure Environment Technology Co., Ltd.

Address: No. 1403 Bolang Building, NBHTZ, Ningbo, China






Phone: 0086 275 100 8283

Email: info@origin-pure.com

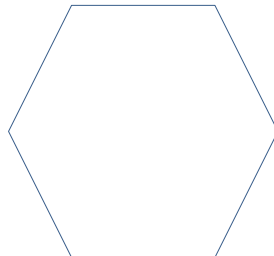

Contents

Company Introduction	0
SteriFlux Pleated Cartridge Filter.....	1
SteriFlux PP Pleated	1
SteriFlux PES Pleated.....	3
SteriFlux PTFE Pleated.....	5
SteriFlux Ny66 Pleated	7
SupFlux High Flow Cartridge Filter	9
SupFlux High Flow	9
SupFlux Outer High Flow	11
SupFlux Inner High Flow	13
AquaFlux Sediment Cartridge Filter	15
AquaFlux Melt Blown	15
AquaFlux String Wound	17
Oilfield Standard Pleated	19
Standard Bag Filter	21
UltraGlass-A Resin Bonded Filter	23
Filter Housing	25
Sanitary Filter Housing.....	25
Bag Filter Housing.....	27
High Flow Filter Housing	28

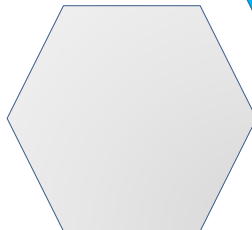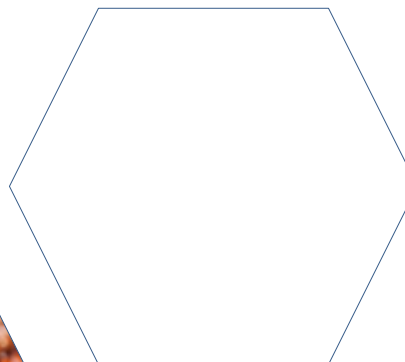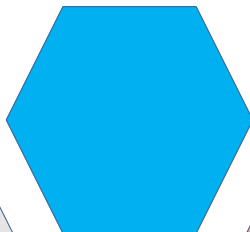

Company Introduction

SGS
Test Report
No. SHAFD1606220307
Date: 14 Jun 2016
Page 1 of 6
Origin Pure Environment Technology Co., Ltd.
No. 1403, Boreo Building, NDKTZ, Ningbo, China

The following sample(s) were submitted and identified on behalf of the client as: Polyethersulfone cartridge filter.

SGS Job No.: SHHGA140606070H - GH
Date of Sample Received: 14 Jun 2016
Testing Period: 14 Jun 2016 - 16 Jun 2016
Test Requested: Selected test(s) as requested by client.
Test Method: Please refer to test page(s).
Test Results: Please refer to test page(s).

Test Requested	Conclusion
FDA 21 CFR 177.2110-Chloroform soluble extractives	PASS
FDA 21 CFR 177.2440-Chloroform/insoluble extractives	PASS
FDA 21 CFR 177.1520-Extractions fraction	PASS
FDA 21 CFR 177.1520-Soluble fraction in Xylene	PASS
FDA 21 CFR 177.1520-Density at 23°C	PASS
FDA 21 CFR 177.1520-Boiling point	PASS

Signed and on behalf of:
SGS-CTC Technical Services (Shanghai) Co., Ltd.
Ji Fan
Approved Signatory

NSF International
789 N. Dixboro Road, Ann Arbor, MI 48105 USA
RECOGNIZES
Origin Pure Environment Technology Co., LTD
Facility: Ningbo, China
AS COMPLYING WITH NSF/ANSI 61 AND ALL APPLICABLE REQUIREMENTS.
PRODUCTS APPEARING IN THE NSF OFFICIAL LISTING ARE
AUTHORIZED TO BEAR THE NSF MARK.



NSF **ANSI**

This document is the property of NSF International and must be returned upon request. No part of this document may be reproduced without written permission from NSF International. For the most current and complete listing information, please refer to NSF's official listing website.

August 22, 2017
Certificate C081201-01
Zoe Yeh
General Manager, Water Division

Origin Pure Environment Technology Co., Ltd. is a one stop filtration solutions professional manufacturer and supplier, committed to provide high quality filtration solution to meet worldwide customers various needs with good service, struggle for health, safety and environment friendly sustainable development.

Since 2015, Origin Pure Environment Technology specialized in better filtration solutions, supply good quality filters, membrane & housings to a diverse range of customers in water treatment, food & beverage, oil & chemicals, electronics, petrochemical, sea water desalination, power plant etc.



PP Pleated Cartridge Filter —PPL&PPA Pleated Cartridge Filter

SteriFlux series PP pleated cartridge filter with good cost and performance rate, Ideal for per filtration and clarification in different application.



Feature:

- 100% All Polypropylene material for excellent chemical compatibility
- Different filtration ratings to meet various application requirement
- Deep filtration construction, longer service life, lower cost
- Thermal welding process and free of any adhesive
- Larger surface area, resulting in low clean Δp and higher dirty holding capacity

Specification


Length	5' ' ~50' '
Micron Rate	0.1 μ m~10 μ m
Diameter -OD	65mm, 69mm, 83mm, 114mm

Material Construction

Filter Media	100% PP
Supporter	PP No Woven Fiber
Core	PP/SS 304/SS 316


Operation Condition

Max. Pressure Drop	0.35Mpa@25°C
	0.20Mpa@75°C
Max. Working Temp.	80°C
Charge Out	0.25Mpa
Pressure Drop	
Sterilization	20times Autoclave @121°C 30mins


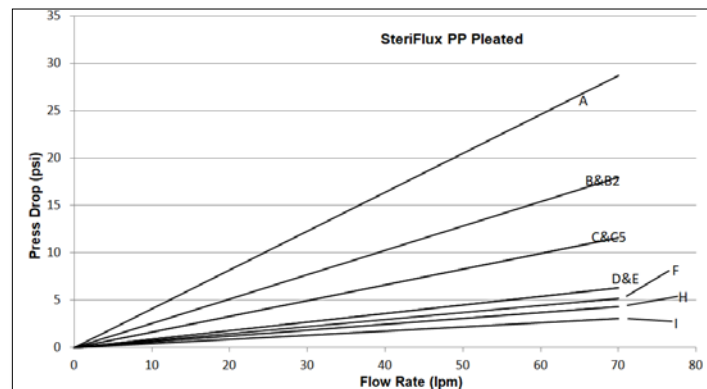


Order Information

PPL	10	F	2F	P	S
PPL-Nominal PP	05=5 "	A-0.1 μ m	O-DOE	P-PP core	S-Silicone
pleated	10-10 "	B-0.2 μ m	2F-222/Fin	4S-304 SS	E-EPDM
PPA-Absolute	20-20 "	B2-0.22 μ m	2FI-222/Fin with SS	6S-316LS	N-NBR
PP pleated	30-30 "	C-0.45 μ m	insert	S	V-Viton
	40-40 "	C5-0.5 μ m	2T-222/Flat		F-PTFE
	50-50 "	D-0.65 μ m	2TI-222/Flat with		EV-Encapsule
	60=60' '	E-0.8 μ m	SS insert		d Viton
	70=70' '	F-1.0 μ m	6F-226/Fin		ES-Encapsule
	80=80' '	F2-1.2 μ m	6FI-226/Fin with SS		d Silicon
		G-2.0 μ m	insert		
		H-5.0 μ m	6T-226/Flat		
		I-10.0 μ m	6TI-226/Flat with		
			SS insert		

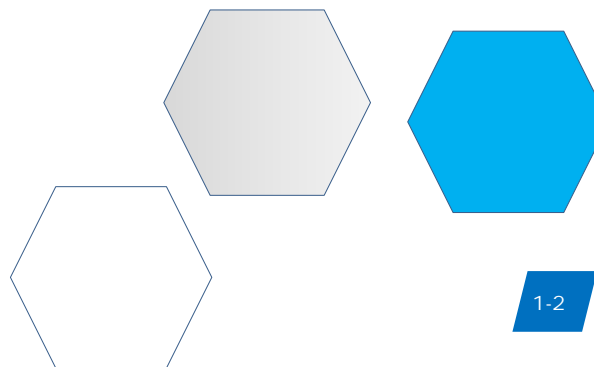

PES Pleated Cartridge Filter —S&SD Pleated Cartridge Filter

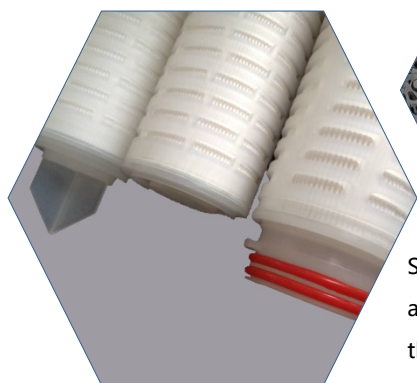

SteriFlux Series PES membrane cartridge filter with highly asymmetric PES membrane and PP hardware. Using thermal bonding process, contain no adhesive and surfactant. All filter with 100% Integrity test, it provide greater bacteria and particle removal at high flow rate and low pressure drop.

Feature:

- 100% All Polypropylene material for excellent chemical compatibility
- Different filtration ratings to meet various application requirement
- Deep filtration construction, longer service life, lower cost
- Thermal welding process and free of any adhesive
- Larger surface area, resulting in low clean Δp and higher dirty holding capacity

Material Construction

Filter Media	PES
Supporter	PP No Woven Fiber
Core	PP/SS 304/SS 316

Specification

Length	5' ' ~40' '
Micron Rate	0.1 μ m~1.2 μ m
Diameter -OD	65mm, 69mm, 83mm, 114mm

Operation Condition

Max. Pressure	0.35Mpa@25°C
Drop	0.20Mpa@75°C

Max. Working Temp.	80°C
--------------------	------

Charge Out	0.25Mpa
Pressure Drop	


Sterilization	200times	Autoclave
	@121°C	30mins



Bacteria Challenge

B.diminuta	LRV>7
L. Lindneri	LRV>7
L. Lindneri	LRV>6

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21 and EC/1935/2004 and subsequent amendments.

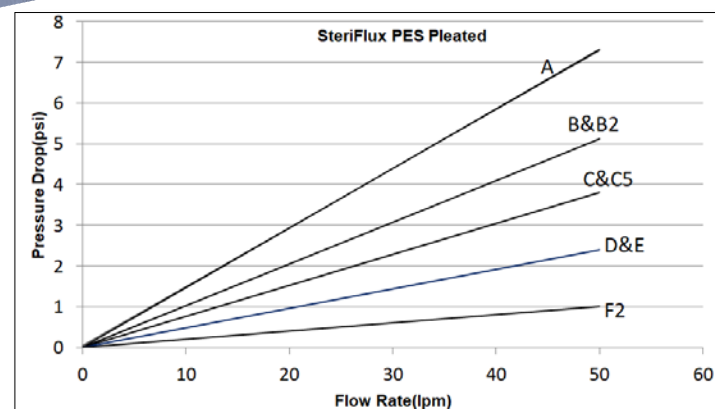

Order Information






S	10	F	2F	P	S
S-PES	05=5' '	A-0.1 μ m	O-DOE	P-PP core	S-Silicone
SD-Double	10-10 "	B-0.2 μ m	2F-222/Fin	4S-304 SS	E-EPDM
Layers PES	20-20 "	B2-0.22 μ m	2FI-222/Fin with SS insert	6S-316LSS	N-NBR
	30-30 "	C-0.45 μ m	2T-222/Flat		V-Viton
	40-40 "	C5-0.5 μ m	2TI-222/Flat with SS insert		F-PTFE
		D-0.65 μ m	6F-226/Fin		EV-Encapsuled
		E-0.8 μ m	6FI-226/Fin with SS insert		Viton
		F-1.0 μ m	6T-226/Flat		ES-Encapsuled
		F2-1.2 μ m	6TI-226/Flat with SS insert		Silicon

PTFE Pleated Cartridge Filter—OPT&LPT Pleated Cartridge Filter

SteriFlux Series PTFE cartridge filter are designed specifically for use in a wide range of aggressive gas and liquid processing applications and available for most of Chemical and organic solvent, its Hydrophobic PTFE membrane makes this cartridge an ideal choice for systems requiring excellent compatibility, reliability and a consistently high quality filtrate.

Feature:

- Excellent Chemical compatibility
- Widely Porosity rate
- Low extractable rate
- 99.98% Filtration efficiency rate
- 100% Integrity test
- Thermally bonded and adhesive free.

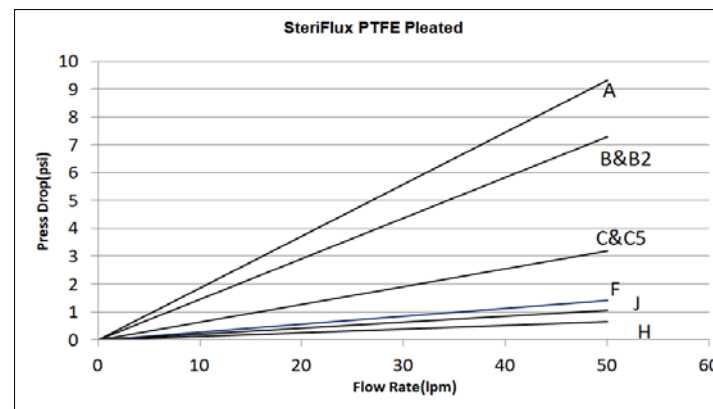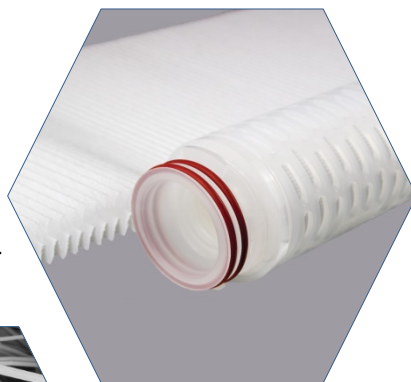

Operation Condition

Max. Pressure 0.35Mpa@25°C
Drop

0.20Mpa@75°C

Max. Working Temp. 80°C

Charge Out 0.25Mpa

Pressure Drop

Sterilization 200times Autoclave
@121°C 30mins

Bacteria Challenge

B.diminuta LRV>7

L. Lindneri LRV>7

L. Lindneri LRV>6

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21 and EC/1935/2004 and subsequent amendments.

Material Construction

Filter Media	Hydrophobic PTFE
Supporter	PP No Woven Fiber
Core	PP/SS 304/SS 316

Specification



Length	5' ' ~40' '
Micron Rate	0.1µm~1.2µm
Diameter -OD	65mm, 69mm, 83mm, 114mm

Order Information

OPT	10	F	2F	P	S
OPT-Hydrop	05=5' '	A-0.1µm	O-DOE	P-PP core	S-Silicone
hobic PTFE	10-10 "	B-0.2µm	2F-222/Fin	4S-304 SS	E-EPDM
LPT-Hydrophi	20-20 "	B2-0.22µm	2FI-222/Fin with SS	6S-316LS	N-NBR
lic PTFE	30-30 "	C-0.45µm	insert	S	V-Viton
	40-40 "	C5-0.5µm	2T-222/Flat		F-PTFE
		D-0.65µm	2TI-222/Flat with		EV-Encapsu
		E-0.8µm	SS insert		led Viton
		F-1.0µm	6F-226/Fin		ES-Encapsu
		F2-1.2µm	6FI-226/Fin with SS		led Silicone
			insert		
			6T-226/Flat		
			6TI-226/Flat with		
			SS insert		

Nylon Pleated Cartridge Filter —N6&NC Pleated Cartridge Filter

SteriFlux Series Nylon66 membrane cartridge filter is installed by hydrophilic Nylon membrane, which has extra low protein absorb and high flow rate feature.

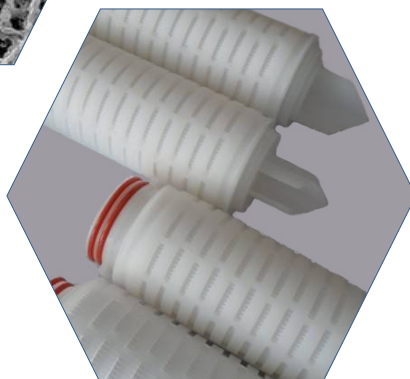

Feature:

- Hydrophilic Nylon 66 membrane without pre wetting
- Excellent pliability and pore distribution to ensure effective ratio
- Great Chemical compatibility
- No fiber released and low extractable

Material Construction

Filter Media	PES
Supporter	PP No Woven Fiber
Core	PP/SS 304/SS 316

Specification

Length	5' ' ~40' '
Micron Rate	0.1μm~1.2μm
Diameter -OD	65mm, 69mm, 83mm, 114mm

Operation Condition

Max. Pressure 0.35Mpa@25°C
Drop

0.20Mpa@75°C

Max. Working Temp. 80°C

Charge Out 0.25Mpa
Pressure Drop

Sterilization 200times Autoclave
@121°C 30mins

Bacteria Challenge

B.diminuta LRV>7


L. Lindneri LRV>7

L. Lindneri LRV>6

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21 and EC/1935/2004 and subsequent amendments.

Order Information

N6	10	F	2F	P	S
N6-Nylon66	05=5' '	A-0.1μm	O-DOE	P-PP core	S-Silicone
NC-Charged	10-10 "	B-0.2μm	2F-222/Fin	4S-304 SS	E-EPDM
Nylon66'	20-20 "	C-0.45μm	2FI-222/Fin with SS insert	6S-316LSS	N-NBR
	30-30 "	D-0.65μm	2T-222/Flat		V-Viton
	40-40 "	F-1.0μm	2TI-222/Flat with SS insert		F-PTFE
			6F-226/Fin		EV-Encapsuled
			6FI-226/Fin with SS insert		Viton
			6T-226/Flat		ES-Encapsuled
			6TI-226/Flat with SS insert		Silicon

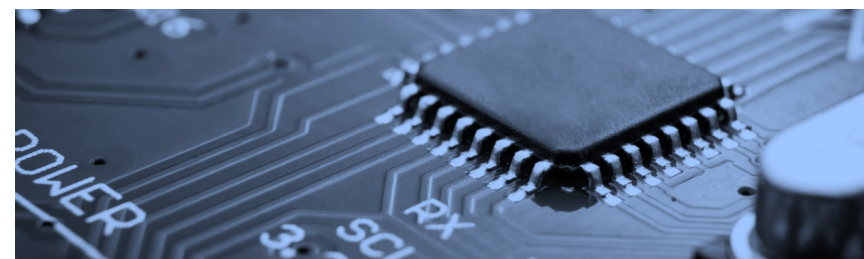

High Flow Cartridge Filter —SupFlux High Flow

SupFlux Series High Flow cartridge filter is made by 100% Polypropylene material. As outside diameter 6' ' large surface pleated cartridge filter, It own great dirty holding capacity and high flow rate.

Feature:

- 100% Polypropylene Material
- Fewer cartridge and less time to assemble
- Handle design makes quick change
- Large surface area for longer lifespan



Material Construction


Filter Media	PP	Pleated/GF Pleated/PP Melt Blown
Supporter	PP No Woven Fiber	
Cage	PP Cage/ Net	

Specification

Length	20' ' ,40' ' ,60' '
Micron Rate	1μm~20μm
Diameter -OD	152mm


Operation Condition

Max. Pressure Drop	0.38Mpa@25°C
Max. Working Temp.	80°C
Charge Out Pressure Drop	0.25Mpa

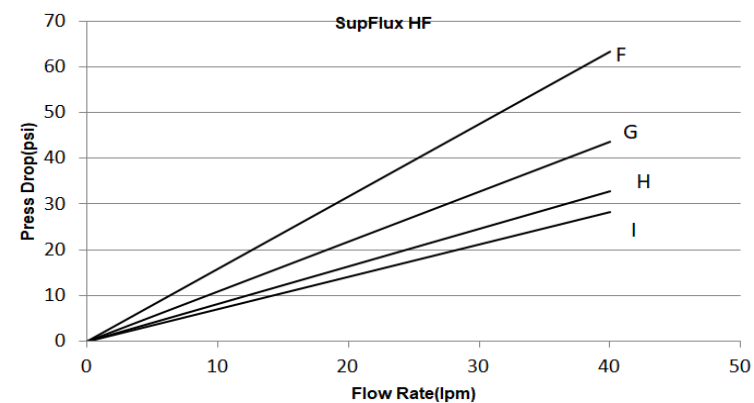


Order Information

HFSP	40	F	N	S
HFSP-PP High Flow	20-20 "	F-1.0μm	N=No Core	S-Silicone
HFSG-GF High Flow	40-40 "	H-5.0μm	P-PP core	E-EPDM
HFB-Melt Blown High Flow	60-60 "	I-10.0μm		N-NBR
		J-20.0μm		V-Viton



High Flow Cartridge Filter—SupFlux Outer High Flow

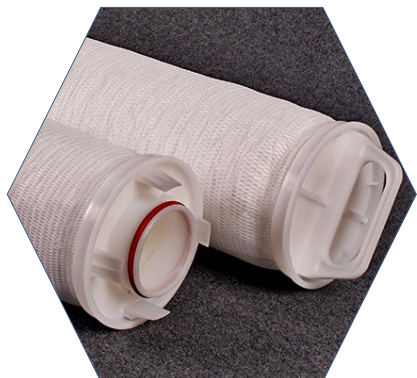

SupFlux Series Outer High Flow cartridge filter is designed with ergonomic and super lock for reducing leak risk. As outside diameter 6" ' large surface pleated cartridge filter, It own great dirty holding capacity and high flow rate.

Feature:

- Ergonomic and super lock design
- Fewer cartridge and less time to assemble
- High flow rate and efficiency
- Large surface area for longer lifespan

Material Construction


Filter Media	PP Pleated/GF Pleated
Supporter	PP No Woven Fiber
Cage	PP Cage

Specification

Length	20' ' ,40' ' ,60' ' '
Micron Rate	1μm~20μm
Diameter -OD	152mm



Operation Condition

Max. Pressure	0.35Mpa@25°C
Drop	
Max. Working Temp.	80°C
Charge Out	0.25Mpa
Pressure Drop	



Order Information

HKP	40	F	P	S	S
HKP-PP High Flow	20-20 " 40-40 "	F-1.0μm G-2.0μm	P-PP core	S-Single Oring	S-Silicone E-EPDM
HRKP-PP Redial Type	60-60 "	H-5.0μm I-10.0μm		D-Double Oring	N-NBR V-Viton
HKG-GF High Flow		J-20.0μm			

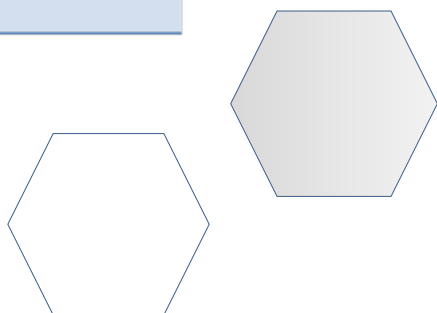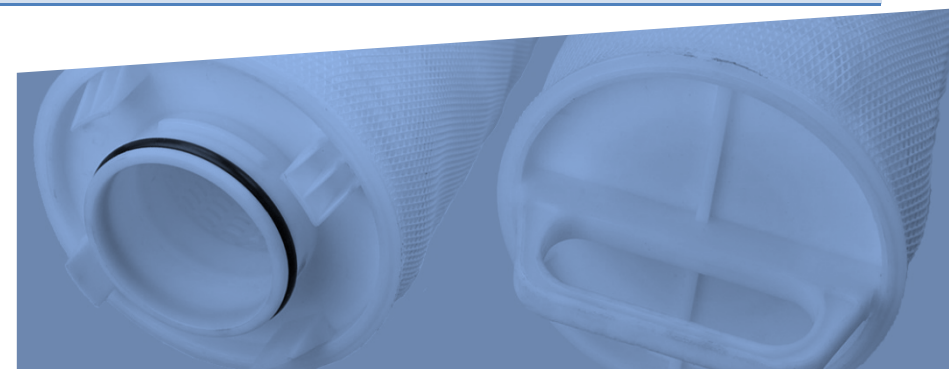

High Flow Cartridge Filter—SupFlux Inner High Flow



SupFlux Series Inner High Flow cartridge filter is designed with insert oring for reducing leak risk. As outside diameter 6" large surface pleated cartridge filter, It own great dirty holding capacity and high flow rate.

Feature:

- 100% Polypropylene Material
- Fewer cartridge and less time to assemble
- Handle design makes quick change
- Large surface area for longer lifespan

Material Construction

Filter Media	PP	Pleated/GF Pleated
Supporter	PP No Woven Fiber	
Cage	PP Cage	

Specification



Length	20" , 40" , 60"
Micron Rate	1μm~20μm
Diameter	152mm
-OD	

Operation Condition

Max. Pressure 0.35Mpa@25°C
Drop


Max. Working 80°C
Temp.

Charge Out 0.25Mpa
Pressure Drop

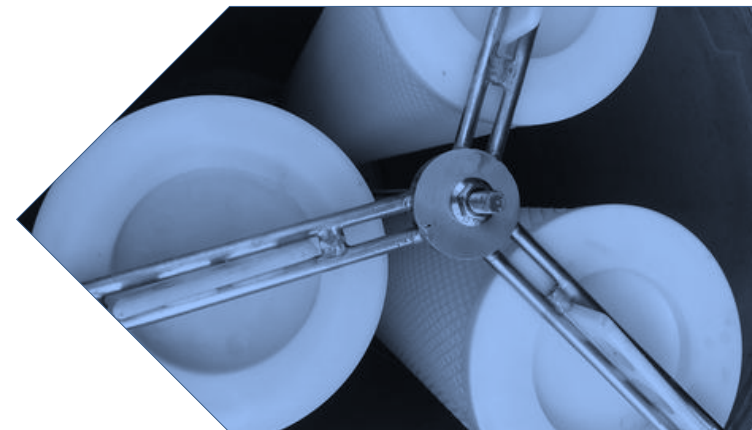

Order Information

HFSP	40	F	N	S
HFSP-PP High Flow	20-20"	F-1.0μm	N=No Core	S-Silicone
HFSG-GF High Flow	40-40"	H-5.0μm	P-PP core	E-EPDM
HFB-Melt Blown High Flow	60-60"	I-10.0μm		N-NBR
		J-20.0μm		V-Viton


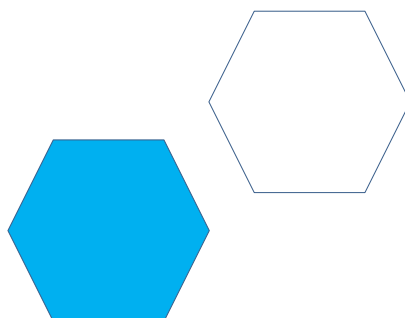


Sediment Cartridge Filter —Melt Blown Cartridge Filter

Melt Blown cartridge filter is made by 100% Polypropylene material. Its 3 Nano fiber layer provide absolute efficiency rate. It also own great dirty holding capacity and high flow rate. Meet NSF and FDA requirement.

Feature:

- 100% Polypropylene Material
- 3 Nano fiber layers for better lifespan
- NSF, FDA certificates

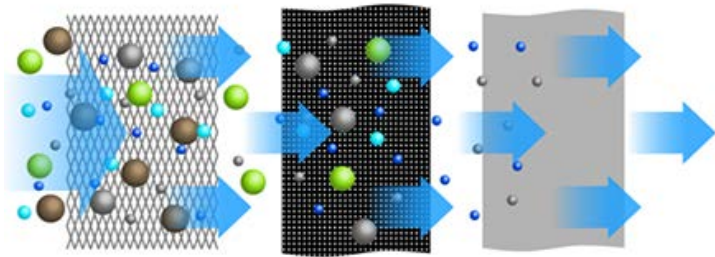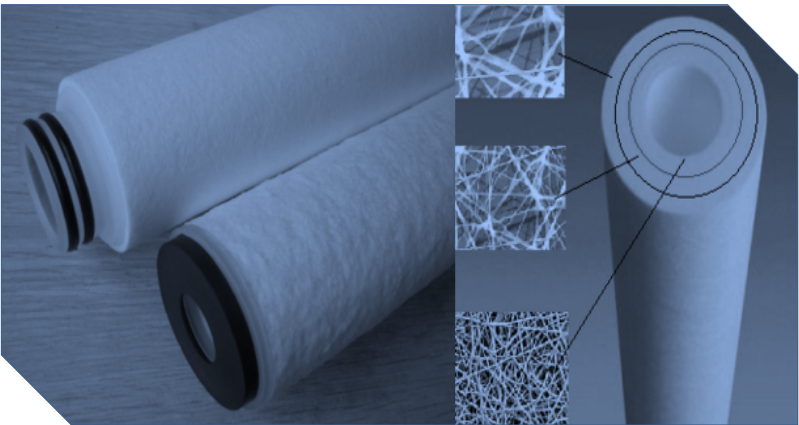

Material Construction

Filter Media	100% PP
Core	None / PP

Specification

Length	5' ' ~50' '
Micron Rate	1µm~150µm
Diameter -OD	63mm, 114mm, 152mm
-ID	28mm, 30mm, 114mm

Operation Condition

Max. Pressure	0.33Mpa
Drop	
Max. Working Temp.	80°C
Charge Out Pressure Drop	0.25Mpa

Order Information

SP	10	C	2FI	P	S
SP-General	5-5 "	C5-0.5µm	O-Cut DOE	P-PP core	S-Silicone
SP1-Grooved	10-10 "	F-1.0µm	OF-DOE with Flat Gasket	N-No Core	E-EPDM
SP2-	20-20 "	G-2.0µm	2F-222/Fin		N-NBR
SP3-	30-30 "	H-5.0µm	2T-222/Flat		V-Viton
SPB-Big Blue	40-40 "	I-10.0µm	6F-226/Fin		
SPO-Coreless	50-50 "	J-20.0µm	6T-226/Flat		
		K-50.0µm	S-Self-seal Spring		
		L-100µm	X-Extended Core		
		M-150µm			

Sediment Cartridge Filter —String Wound Cartridge Filter



String Wound cartridge filter is made by 100% PP string. Max wound process to add 30% material for great dirty holding capacity. Widely chemical compatibility. Special connector for different work condition

Feature:

- Max wound process add 30% weight
- Widely chemical compatibility
- Special connector for different work condition

Material Construction

Filter Media	PP/Cotton/Glass Fiber
Core	PP/SS 304/SS 316

Specification

Length	10' ' ~50' '
Micron Rate	1µm~150µm
Diameter -OD	63mm, 114mm
-ID	28mm


Operation Condition

Max. Pressure	0.33Mpa
Drop	
Max. Working Temp.	80°C&120°C
Charge Out Pressure Drop	0.25Mpa




Order Information

WP	10	F	2F	P	S
WP-General	10-10 "	F-1.0µm	O-DOE	P-PP core	S-Silicone
PP	20-20 "	F2-1.2µm	2F-222/Fin	4S-304 SS	E-EPDM
WC-General	30-30 "	G-2.0µm	2T-222/Flat	6S-316LSS	N-NBR
Cotton	40-40 "	H-5.0µm	6F-226/Fin		V-Viton
WPB-Big Blue	50-50 "	I-10.0µm	6T-226/Flat		
PP		J-20.0µm	S-Self-seal Spring		
WCB-Big Blue		K-50.0µm	X-Extended Core		
Cotton		L-100µm			
		M-150µm			

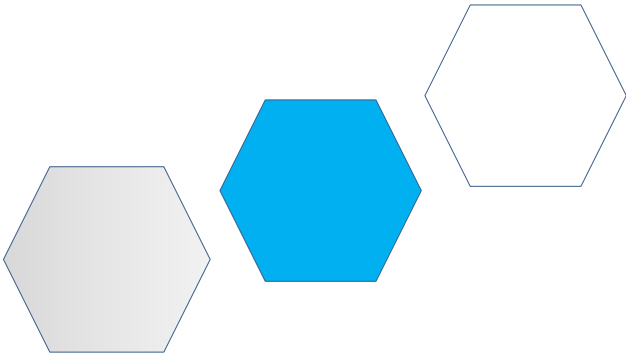

Standard Pleated Cartridge Filter —SupFlux Outer High Flow

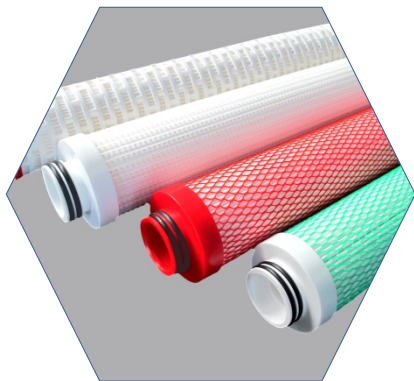

Standard Pleated Cartridge Filter is made by glass fiber material and special structure. It would be mainly used Oil field filtration. As glass fiber have good performance to absorb oil from wells' water, It have cage and net as option for different application

Feature:

- Glass Fiber + Polypropylene Material
- Good oil absorb feature
- High flow rate and dirty holding capacity



Order Information

OGF	10	F	2T	N	P	E
OPP-PP	10-10"	C5-0.5µm	OF-DOE with	N- PET Mesh	P-PP core	E-EPDM
Pleated	20-20"	F-1.0µm	Flat Gasket	C-PP Cage	4S-304 SS	N-NBR
OGF-GF	30-30"	H-5.0µm	2T-222/Flat		6S-316LSS	V-Viton
Pleated	40-40"	I-10.0µm				
		J-20.0µm				
		K-50.0µm				

Material Construction


Filter Media	PP/Glass Fiber
Cage	PP Cage/PET Mesh
Core	PP/SS 304/SS 316
End Cap	PP/ABS

Specification

Length	20' ' ,40' ' ,60' '
Micron Rate	1µm~20µm
Diameter -OD	152mm

Operation Condition

Max. Pressure	0.5Mpa @25°C
Drop	0.3Mpa @65°C
Max. Working Temp.	80°C
Charge Out Pressure Drop	0.25Mpa

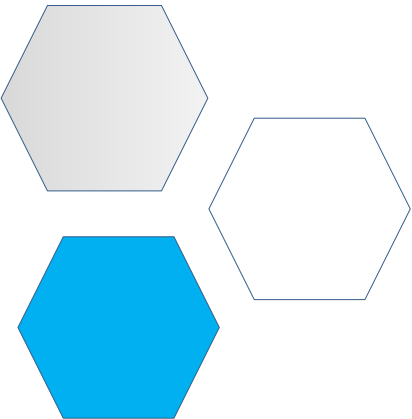


Standard Bag Filter—liquid Bag Filter

Standard Bag Filter is made by Polypropylene, Polyester and Nylon mesh material. They are suitable for a wide range of liquid applications, such as the filtration of water, edible oil, juices, sugar, dairy, painting oil, wine and so on.

Feature:

- Widely Chemical compatibility
- Large dirty holding capacity
- Material meet NSF and FDA requirement

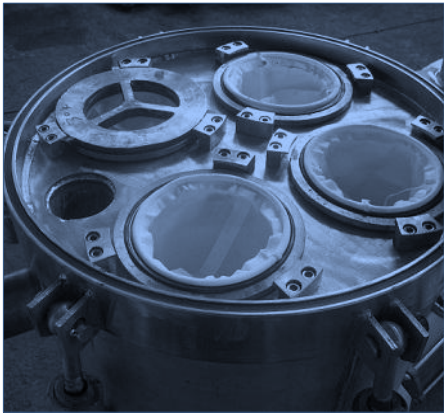


Material Construction

Filter Media	PP/PE/NMO
Micron Rate	1µm~150µm
Gasket	PP/SS 304/SS 316
Handle	F type H type
Size	#1, #2, #3, #4

Item	Outside Dia.	Length	Flux
Size #1	7' '	17' '	20m3/h
Size #2	7' '	32' '	40m3/h
Size #3	4' '	9' '	6m3/h
Size #4	4' '	15' '	12m3/h

Order Information

PO	BF1	F	P	1
PO-Polypropylene	BF1-#1	F-1.0µm	P-PP core	1-F Type
PE-Polyester	BF2-#2	H-5.0µm	4S-304 SS	2-H type
NMO-Nylon	BF3-#3 BF4-#4	I-10.0µm	6S-316LSS	
		J-20.0µm		
		K-50.0µm		
		L-100µm		
		M-150µm		

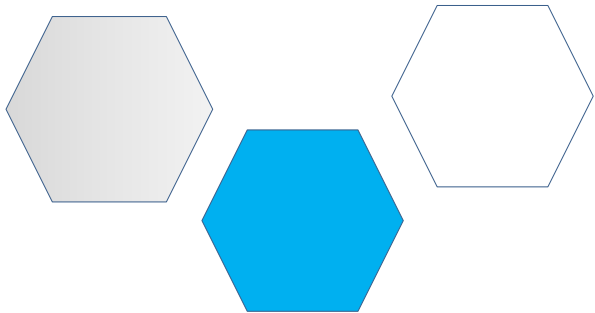


Ultraglas-A Filter Cartridge —Superior Resin Bonded

Ultraglas F Series/P&I Series

The Ultrglas filter cartridge filter are designed using various fiberglass fiber size ranges and controlled gradient densities for various micron ratings, lower replacement cycles, optimum filtration efficiencies and consistent performance between production runs.


Other design feature are a grooved surface, which offers increased effective surface area and dirt holding capacity. Also an ungrooved surface, which provides excellent gel type contaminate removal.

All of our cartridges are available with or without center cores(plastic, tin plate & stainless steel). These cores will allow our cartridges to withstand differential pressures from 50psi to 150psi. We also provide an outer wraps(Cotton or Polyblend) which aids in the handling and protects the grooved surface.

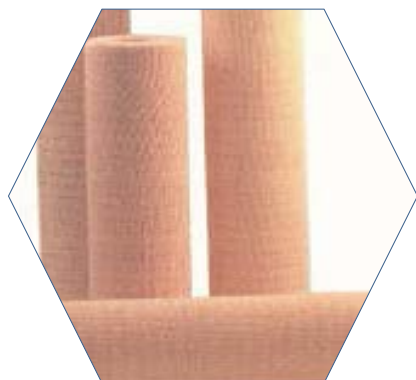

Features

- □ Broadest Chemical Compatibility
- □ Highest Operating Temperature
- □ Option of Metal, Plastic or No Core
- □ Range of 50psi to 150psi Different Pressure
- □ Efficiency Rating from 0.5um to 175um
- □ Available with Optional End Treatments
- □ Broadest Range of Applications
- □ Low Different Pressure & Extended cartridge life

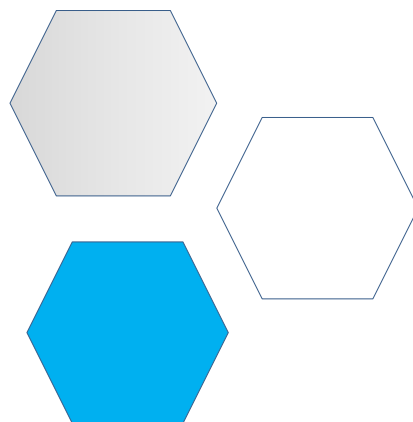

Max. Operation temperature: 200°C

Charge Out Pressure 35psi

Feed water No Core 45 psi

pressure: Plastic Core 70psi


Tin Plate Core 150psi

Stainless Steel Core 100psi

Order Information


RB1	10	C5	O	P
RB-General	03-3' '	C5-0.5um	O-Cut DOE	N-No Core
RB1-Coating	05-4.75' '	F-1.0um		P-Plastic core
	06-6' '	G3-3.0um		M-Metal Core
	09A-9.5' '	H-5.0um		S-SS Core
	09B-9.75' '	I-10.0um		
	10-10" "	J5-25.0um		
	195-19.5' '	K-50.0um		
	20-20" "	K5-75.0um		
	295-29.5' '	L5-125um		
	30-30" "			
	40-40" "			

Sanitary Cartridge Filter Housing—Liquid Filter

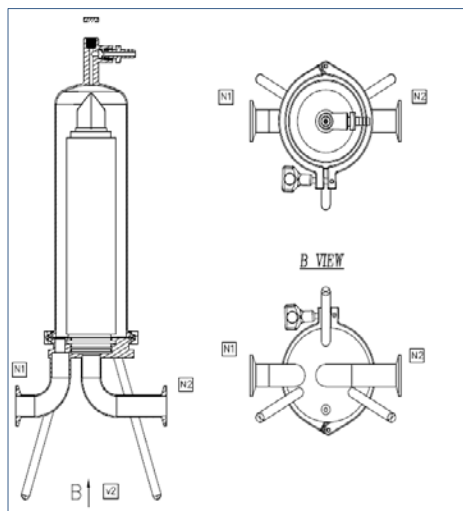

Feature:


- Material:SS304, SS316L
- Connection; Quick Connection Flange,
- Surface Polishing: Mirror and Sandy surface
- Adaptor: 222/226/DOE

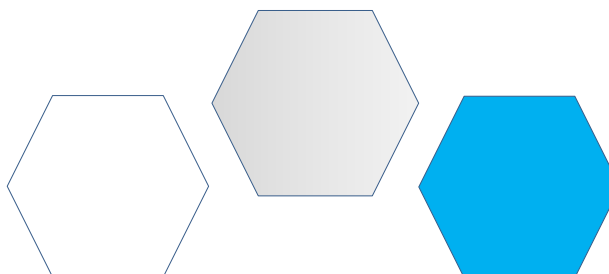

Order Information

Part#	Material	Filter Rounds	Length	Connection	Polishing	Adaptor
LSH	S	010	10	Q	M	2
LSH-Liquid	S-SS304	010-1 Round	10-10"	Q-Quick	M-Mirror	2-222
Sanitary	SS-SS316L	030-3 Rounds	20-20"	Connect	Surface	Adaptor
Housing		050-5 Rounds	30-30"	F-Flange	S- Sub	6-226
GSH-Gas		070-7 Rounds	40-40"		Light	Adaptor
Sanitary		090-9 Rounds				0-DOE
Housing		120-12 Rounds				Adaptor

Sanitary Cartridge Filter Housing—Gas Venting Filter

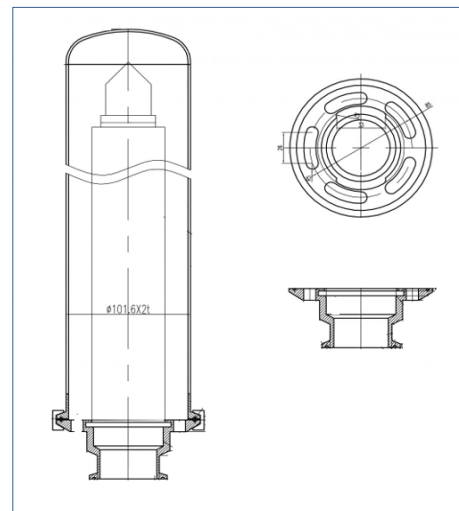


Feature:

- Material:SS304, SS316L
- Connection; Quick Connection Flange,
- Surface Polishing: Mirror and Sandy surface
- Adaptor: 222/226/DOE

Order Information



Part#	Material	Filter Rounds	Length	Connection	Polishing	Adaptor
GSH	S	010	10	Q	M	2
GSH-Gas		010-1 Round				2-222
Sanitary		030-3 Rounds	10-10"		M-Mirror	Adaptor
Housing	S-SS304	050-5 Rounds	20-20"	Q-Quick	Surface	6-226
	SS-SS316L	070-7 Rounds	30-30"	Connect	S-Sub	Adaptor
		090-9 Rounds	40-40"	F-Flange	Light	0-DOE
		120-12 Rounds				Adaptor

Bag Filter Housing —Liquid Filter Housing

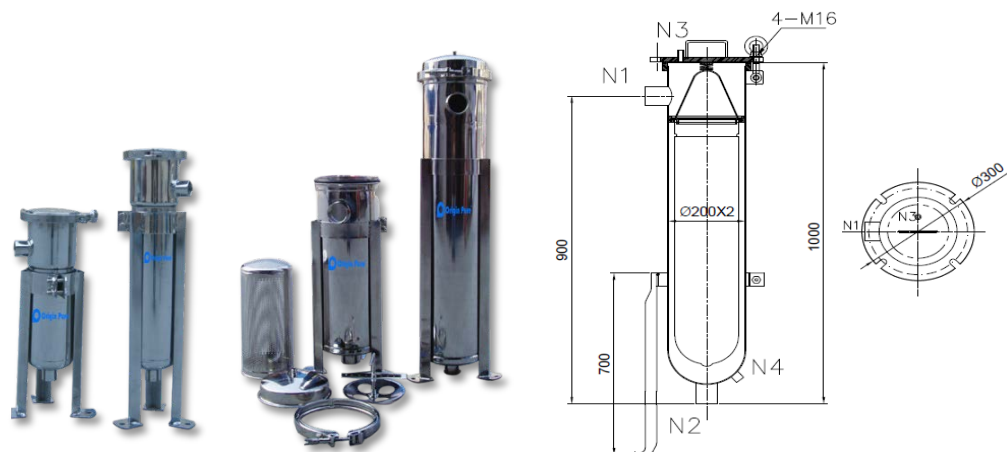


Feature:

- Most reliable Sealing design
- Easy to clean and change out
- 6 bar Operation Pressure and 120°C Temp
- Standard Bag Filter #01, #02, #03 and #04



High Flow Cartridge Filter Housing —Liquid Filter

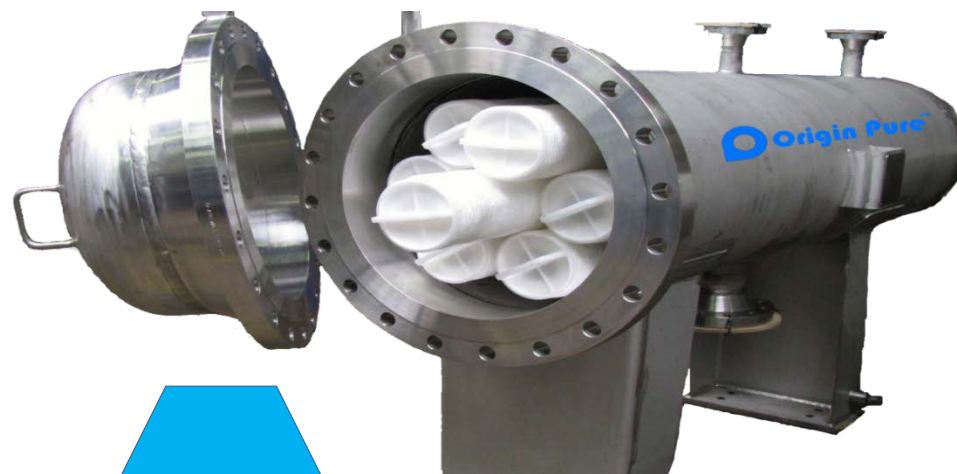

Design Pressure	10bar
Test Pressure	15bar
Working Medium	Water
Design Temperature	120°C
Working Temperature	25°C

Order Information

Part#	Material	Filter Rounds	Bag Size	Connection	Polishing
LBF	S	010	BF1	Q	M
		010-1 Round			
	S-SS304	030-3 Rounds	BF1-#01	Q-Quick	M-Mirror
LBF	SS-SS31	050-5 Rounds	BF2-#02	Connect	Surface
	6L	070-7 Rounds	BF3-#03	F-Flange	S- Sub Light
		090-9 Rounds	BF4-#04		
		120-12 Rounds			

Order Information

Part#	Material	Filter Rounds	Length	Connection	Polishing
HFH	S	010	20	Q	M
		010-1 Round			
	GS-Glass Steel	030-3 Rounds	20-20' '	Q-Quick	S- Sub
HFH	CS-Carbon Steel	050-5 Rounds	40-40' '	Connect	Light
	S-SS304	070-7 Rounds	60-60' '	F-Flange	
	SS-SS316L	090-9 Rounds			
		120-12 Rounds			